



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	4/7/08	D.CASTRO
B	ECN 3321: ADDED PIN VERIFICATION NOTE	5/7/08	D.CASTRO
C	ECN 4363: ADDED WIRE MAP & MTG HARDWARE DETAIL	11/9/09	D. CASTRO
D	ECN 4378: TWO HEX SCREWS WAS FOUR, CHANGED FINISH ON D-SUB CONN	11/13/09	D. CASTRO

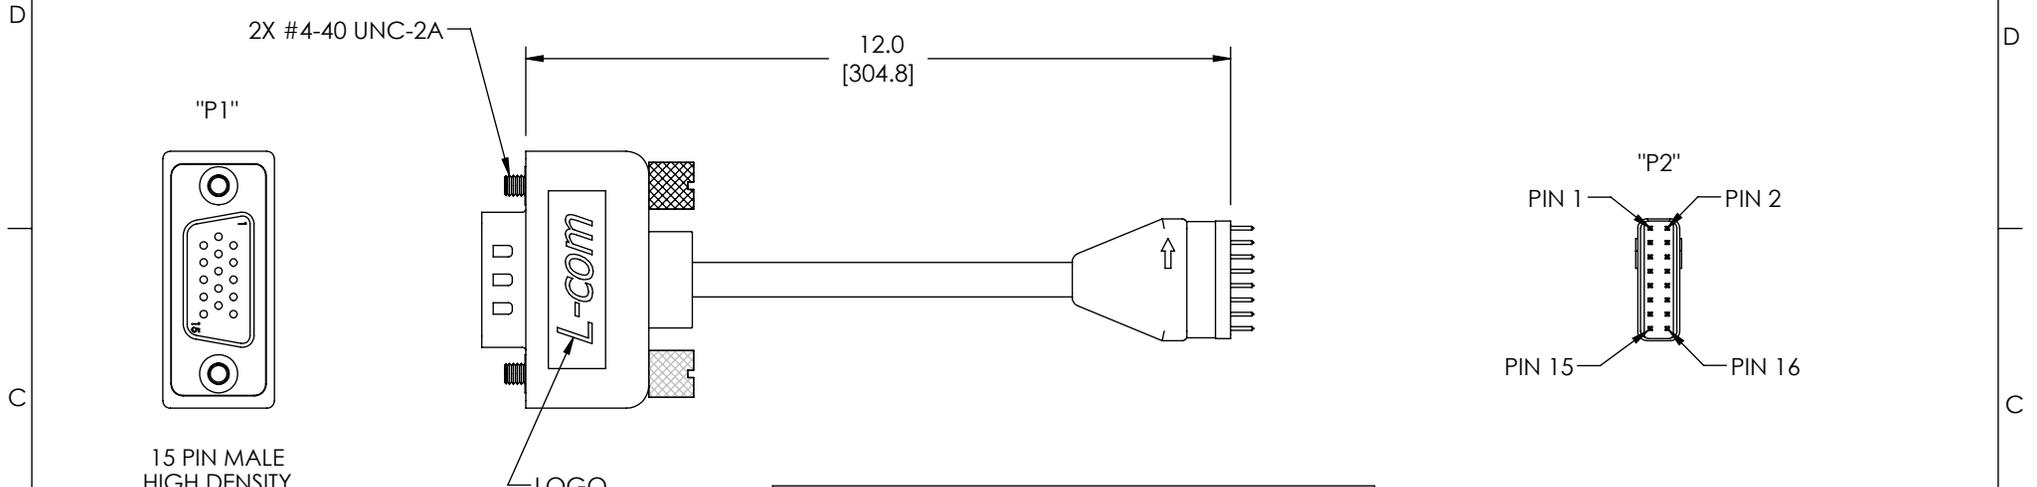

"P1"
15 PIN MALE
HIGH DENSITY
D-SUB CONNECTOR





SPECIFICATIONS

CABLE:
 CONDUCTORS: THREE 75 OHM COAXIAL LINES
 NINE 30 AWG COPPER CONDUCTORS
 SHIELDING: OVERALL ALUMINIZED POLYESTER SHIELD
 PLUS TINNED COPPER BRAID
 JACKET: BLACK PVC

CONNECTOR:
 D-SUB:
 INSULATOR: UL94V-0 PLASTIC
 CONTACTS: GOLD PLATED
 SHELL: FRONT, NICKEL FINISH
 BACK, TIN FINISH
DISCONNECTS:
 16 POSITION, .079" (2mm) PITCH

HOODS:
 MOLDED BLACK PVC
 THUMBSCREWS: NICKEL PLATED

DISCONNECT STRAIN RELIEFS:
 MOLDED BLACK

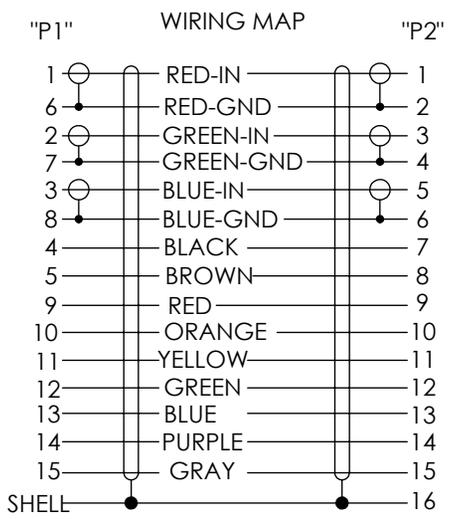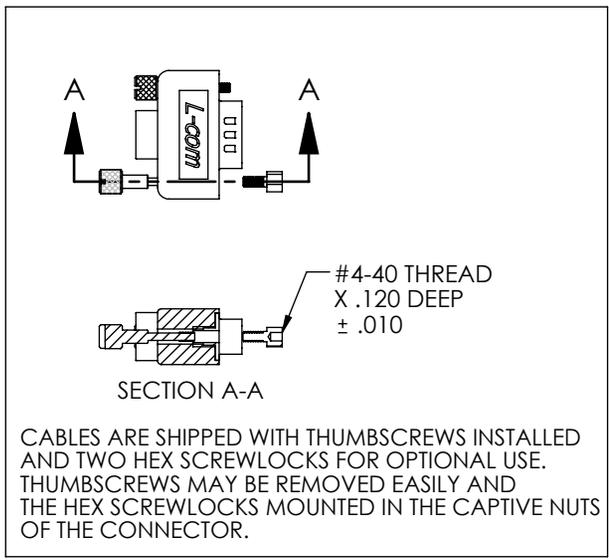

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D.CASTRO CHECKED BY J.RUST APPROVED BY G.PEPIN	DATE 4/7/08 4/7/08 4/7/08	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845				
	CATEGORY VIDEO			PRODUCT DESCRIPTION INTERFACE CABLE			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. CTLB3VGAM-QD
	SCALE: NONE		CAD FILE: CTLB3VGAM-QD.SLDDRW		SHEET 1 OF 1		