
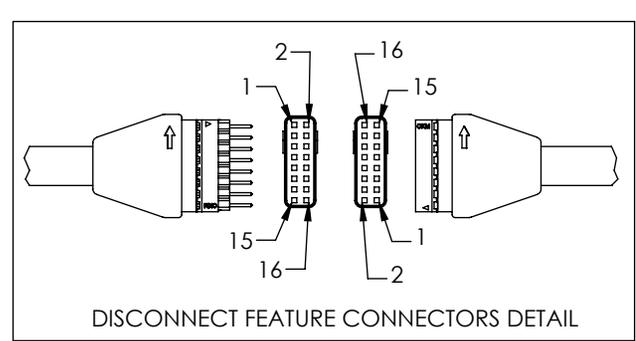



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/2/08	D.GRIFFIN
B	ECN 3450: DELETED HEX SCREW DIMS.	8/6/08	D.CASTRO
C	ECN 4037: SHRINK TUBE DIM 2.40 WAS 2.0	6/4/09	D. CASTRO
-	-	-	-

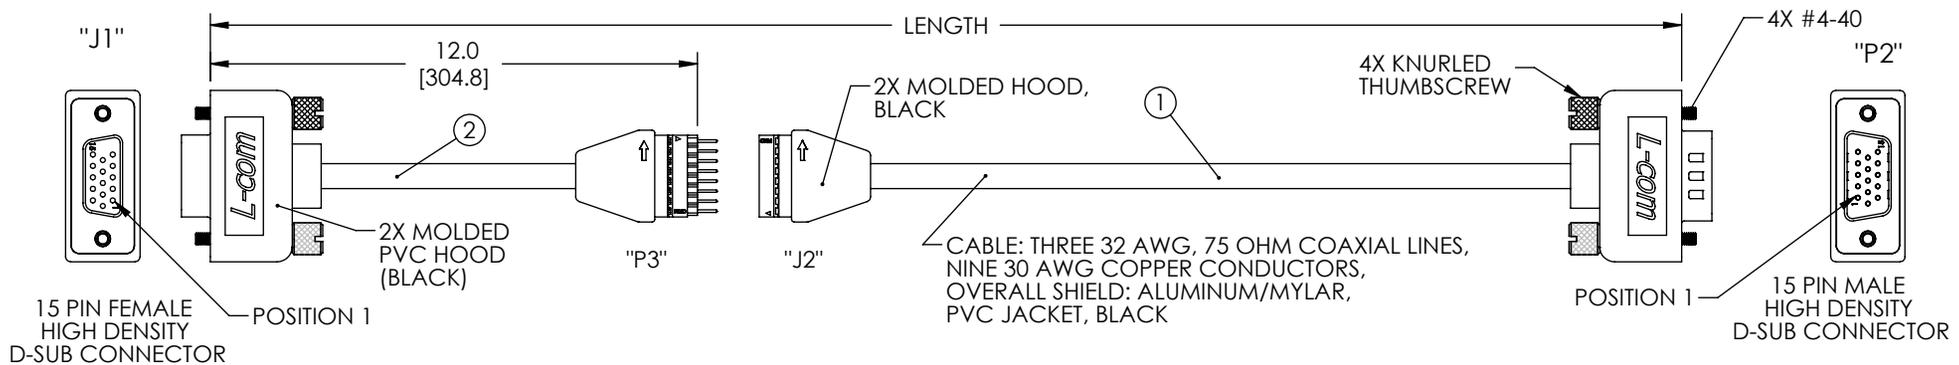


KIT DETAIL		
ITEM NO.	QTY.	DESCRIPTION
1	1	MAIN RUN CABLE
2	1	INTERFACE CABLE
3	4	HEX SCREWLOCK
4	1	SHRINK TUBING: Ø.75 X 2.40 LONG, NON-ADHESIVE 2:1 SHRINK RATIO, COLOR BLACK (NOT SHOWN)
5	1	WALL PLATE

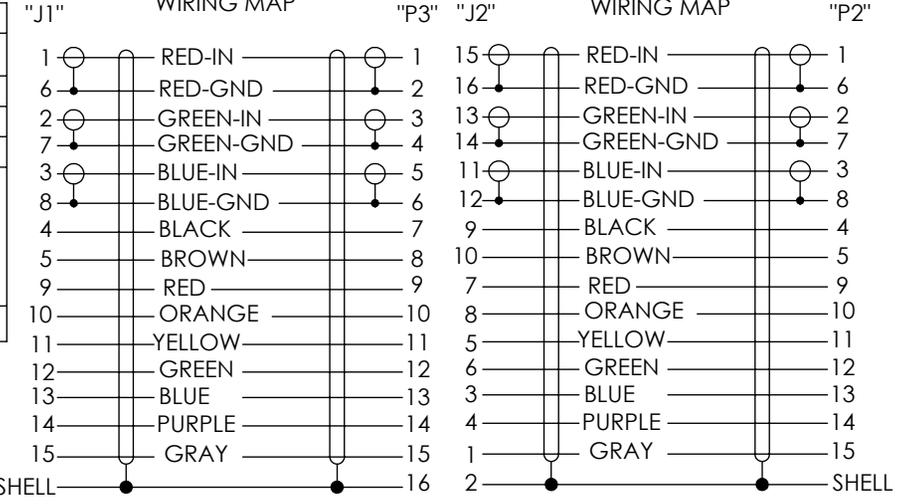

NOTES:
 SHRINK TUBING TO BE PLACED ON CABLE (BY CUSTOMER) PRIOR TO ASSEMBLY, AFTER ASSEMBLY, SLIDE TUBING OVER CONNECTION AND SHRINK.
 ITEMS 3 & 5 PACKAGED WITH CABLE ASSEMBLY (NOT INSTALLED ON CABLE).
 CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN A POLYBAG.

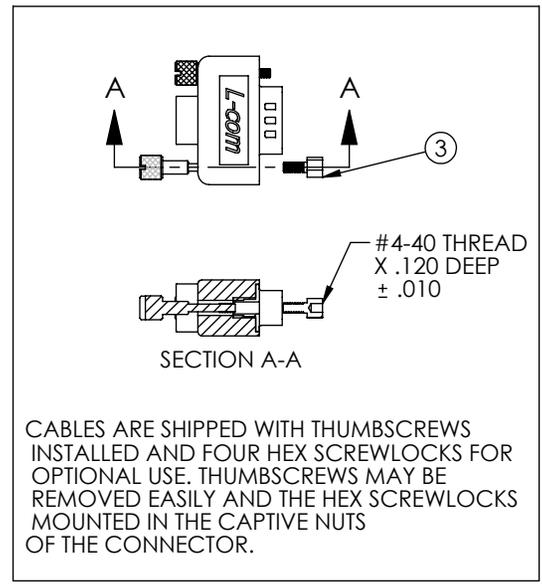

PART NUMBER	LENGTH FEET [METERS]
CTLB3VGAMF-15TWP	15 [4.57]
CTLB3VGAMF-20TWP	20 [6.10]
CTLB3VGAMF-25TWP	25 [7.62]
CTLB3VGAMF-50TWP	50 [15.24]
CTLB3VGAMF-75TWP	75 [22.86]



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.CASTRO	7/1/08	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.15 .XXX = ±.005	CHECKED BY M.SEDLESKI	7/1/08	CATEGORY VIDEO
	APPROVED BY G.PEPIN	7/1/08	PRODUCT DESCRIPTION CA SVGA HD15 M/F W/DISCONNECT/WALL PLT
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A
			FSCM NO. 43321
			DWG. NO. CTLB3VGAMF-TWP
			REV. C
			SCALE: NONE
			CAD FILE: CTLB3VGAMF-TWP.SLDDRW
			SHEET 1 OF 1