


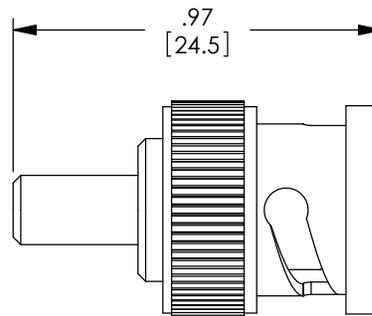
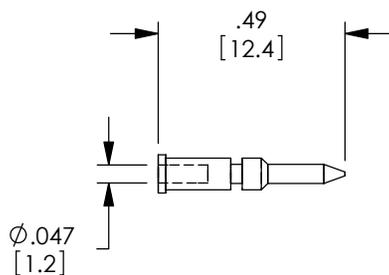


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES HPC782-OD1	10/7/14	D.FRISIELLO

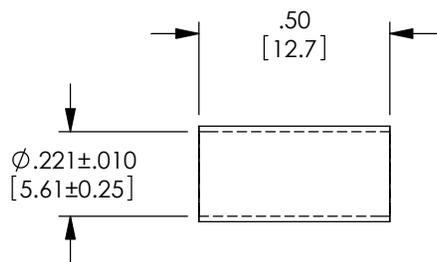

RECOMMENDED FERRULE
CRIMP SIZE
*CENTER PIN SOLDER

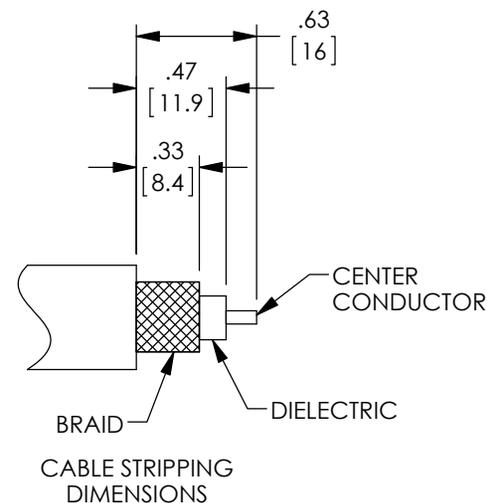

NOTES:
MATERIALS:
BODY: BRASS
FERRULE: COPPER
PIN: BRASS
INSULATOR: PTFE

FINISH:
BODY: NICKEL PLATE
FERRULE: NICKEL PLATE
PIN: GOLD PLATE

ALL DIMENSIONS ARE FOR REFERENCE ONLY.
APPLICATION: BELDEN 7807 CABLE ASSEMBLIES.
IMPEDANCE: 50 OHM

CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	12/02/2004		
PROJECTION 	CHECKED BY D.PARHAM	12/02/2004	PRODUCT DESCRIPTION CONN BNC M BELDEN 7807 CRIMP	
COLOR VARIATIONS MAY OCCUR	APPROVED BY R.CARRICK	12/02/2004	SIZE A	FSCM NO. 43321
SCALE: NONE			DWG. NO. HPC782	REV. A
CAD FILE: HPC782.SLDDRW			SHEET 1 OF 1	