



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED BY
E	ECN 9926; REMOVED PIN MARKING, REMOVED ROHS COMPLIANT STATEMENT	06/24/2019	BGATES

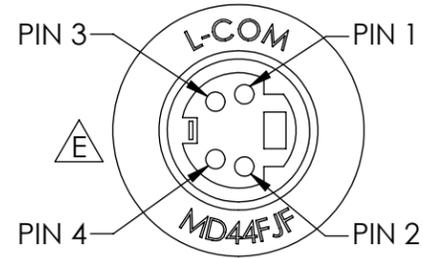

4 POSITION
MINIATURE CIRCULAR DIN



WIRE CHART	
DIN CONNECTOR	WIRE CODE
PIN 1	BLACK
PIN 2	WHITE
PIN 3	RED
PIN 4	GREEN

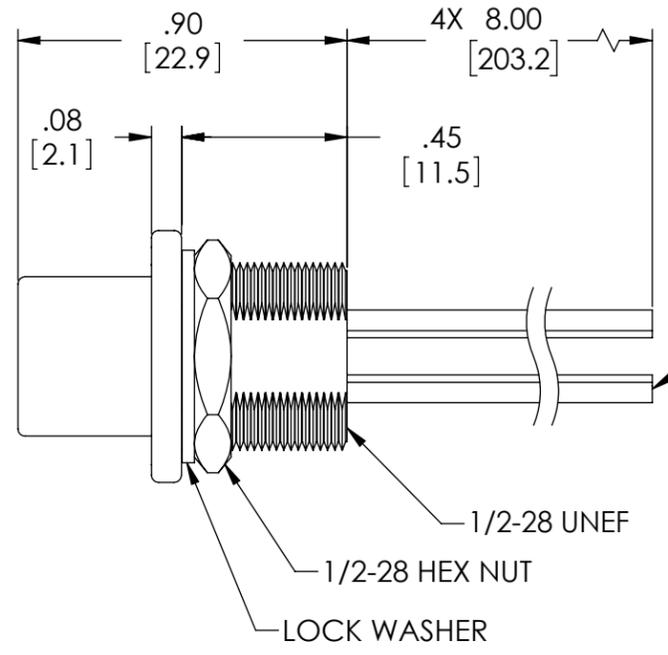

4X BLUNT CUT

SEE NOTE 6

NUT AND WASHER
REMOVED FOR CLARITY.

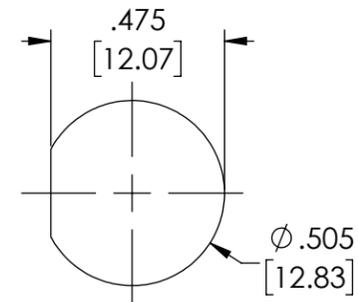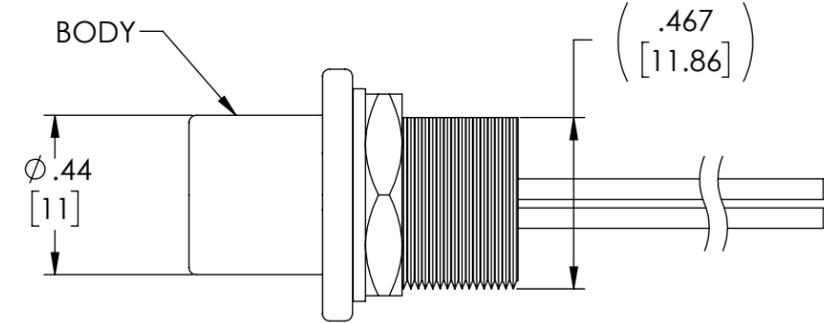

RECOMMENDED
PANEL OPENING

- NOTES:
1. FINISH OF EXTERNAL METAL PARTS NICKEL PLATED.
 2. THE D-FLAT ON THE THREADED BARREL OF ADAPTER MUST BE ALIGNED AS SHOWN ABOVE.
 3. WIRE LEADS ARE 26AWG STRANDED TINNED COPPER WITH PVC INSULATION.
 4. EIGHT INCH WIRES CUT BLUNT.
 5. SILK SCREEN PART NUMBER AND COMPANY NAME USING BLACK INK ON FACE SHOWN.
 6. REAR OF HOUSING TO BE POTTED. MATERIAL; SILICONE RESIN CONFORMAL COATING. COLOR; BLACK
 7. 1/2-28 HEX NUT AND INTERNAL TOOTH WASHER INCLUDED.
 8. COMPONENT ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 9. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2[51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [5.1]
.XXX = ±.005 [1.3]

APPROVALS	DATE
DZINN	06/24/2019
DFRISIELLO	06/24/2019
BGATES	06/24/2019

L-com Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY I/O PRODUCTS

PRODUCT DESCRIPTION
ADPT, MD4F/LEADS BLKHD FRT MNT

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	MD44FJF	E



COLOR VARIATIONS
MAY OCCUR

SCALE: 1:2 CAD FILE: MD44FJF.SLDDRW SHEET 1 OF 1