
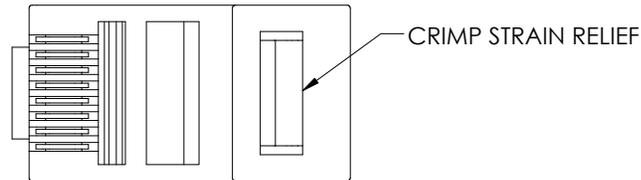
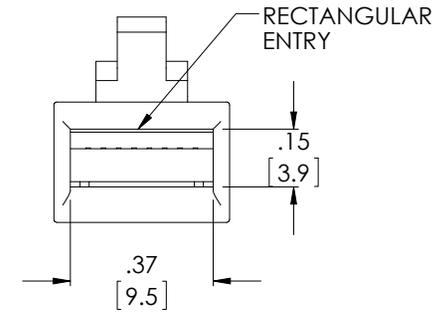
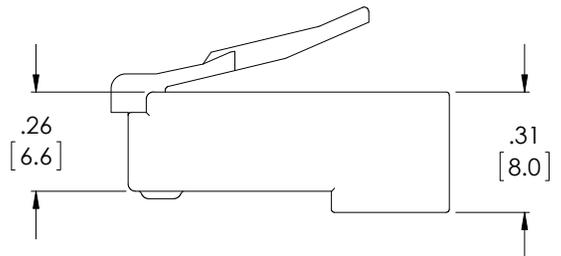
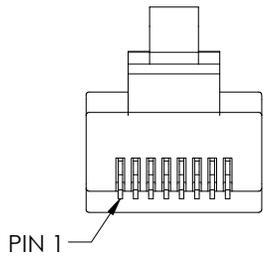


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES TD8P8C-OD1	6/25/14	D. DESJARDIN

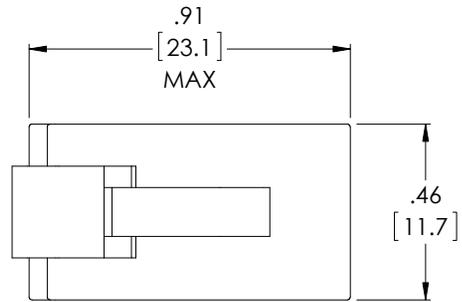

NOTES:

MATERIAL:

HOUSING: POLYCARBONATE, UL94V-0
CONTACTS: COPPER ALLOY

FINISH:

CONTACTS: 15μINCHES GOLD OVER NICKEL

ELECTRICAL:

CURRENT RATING: 2A (MAX)
VOLTAGE RATING: 250 VAC (MAX)
INSULATION RESISTANCE: 500 MΩ (MIN)

MECHANICAL:

CONDUCTOR ACCEPTANCE: 24 TO 28AWG
MAXIMUM CONDUCTOR OD: .038"
CONDUCTOR TYPE: STRANDED OR SOLID
CONTACT STYLE: TWO PRONG

MISCELLANEOUS:

OPERATING TEMPERATURE: -40°C TO +85°C
COMPONENT SHALL BE PACKAGED IN BULK 100 PIECES PER BAG IN ACCORDANCE WITH L-COM SPEC. PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D PARHAM	3/27/2002			
	CHECKED BY T CLARK	3/28/2002	CATEGORY	TELECOM/MODULAR	
	APPROVED BY C McCORMICK	3/28/2002	PRODUCT DESCRIPTION	PLUG, RJ45 (8X8) FLT CBL	
PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TD8P8C	REV. A
TD8P8C-OD1		SCALE: NONE	CAD FILE: TD8P8C.SLDDRW	SHEET 1 OF 1	