

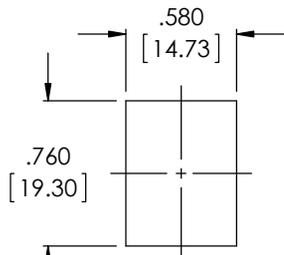
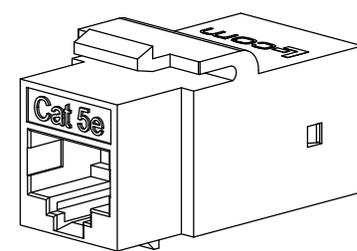
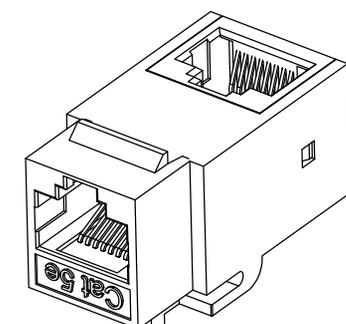

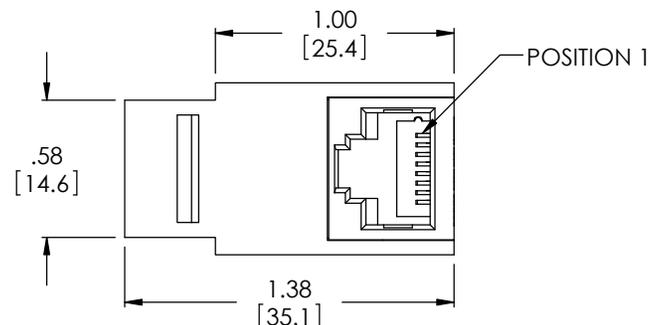


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6881: REVISED PANEL OPENING. ADDED PACKAGING	6/17/13	D_DESJARDIN
F	ECN 7928: ADDED -10°C TO 70°C TEMP RATING. ADDED DETAIL MTL NOTES	4/29/15	D_DESJARDIN

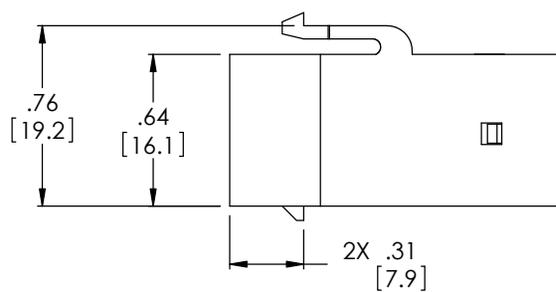

RECOMMENDED
PANEL OPENING

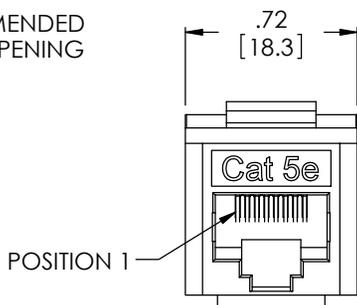

NOTES:

- MATERIAL:**
HOUSING: ABS, UL94V-0 RATED, COLOR: BLACK
CONTACTS: PHOSPHOROUS BRONZE
- FINISH:**
CONTACTS: 50µ" MIN NICKEL UNDERPLATING OVERALL
50µ" GOLD IN CONTACT AREA
- ELECTRICAL:**
RATING: CATEGORY 5E
WIRING: STRAIGHT THROUGH
- MISCELLANEOUS:**
OPERATING TEMPERATURE: -10°C TO +70°C
JACK CONFORMS TO TIA-1096
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY D. PARHAM CHECKED BY ENG APPROVED BY ENG	DATE 10/27/2008 10/27/2008 10/27/2008	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY TELECOM/MODULAR
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE CAD FILE: TDG1026KC-R5E.SLDDRW	PRODUCT DESCRIPTION CPLR RJ45 F/F CAT5E RT ANGLE
	SIZE A	FSCM NO. 43321	DWG. NO. TDG1026KC-R5E	REV. F