


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN 6881: REVISED PANEL OPENING. UPDATED COMPLIANCE NOTE	6/17/13	D. DESJARDIN
E	ECN 7928: ADDED -10°C TO 70°C TEMP RATING. ADDED DETAIL MTL NOTES	4/29/15	D. DESJARDIN

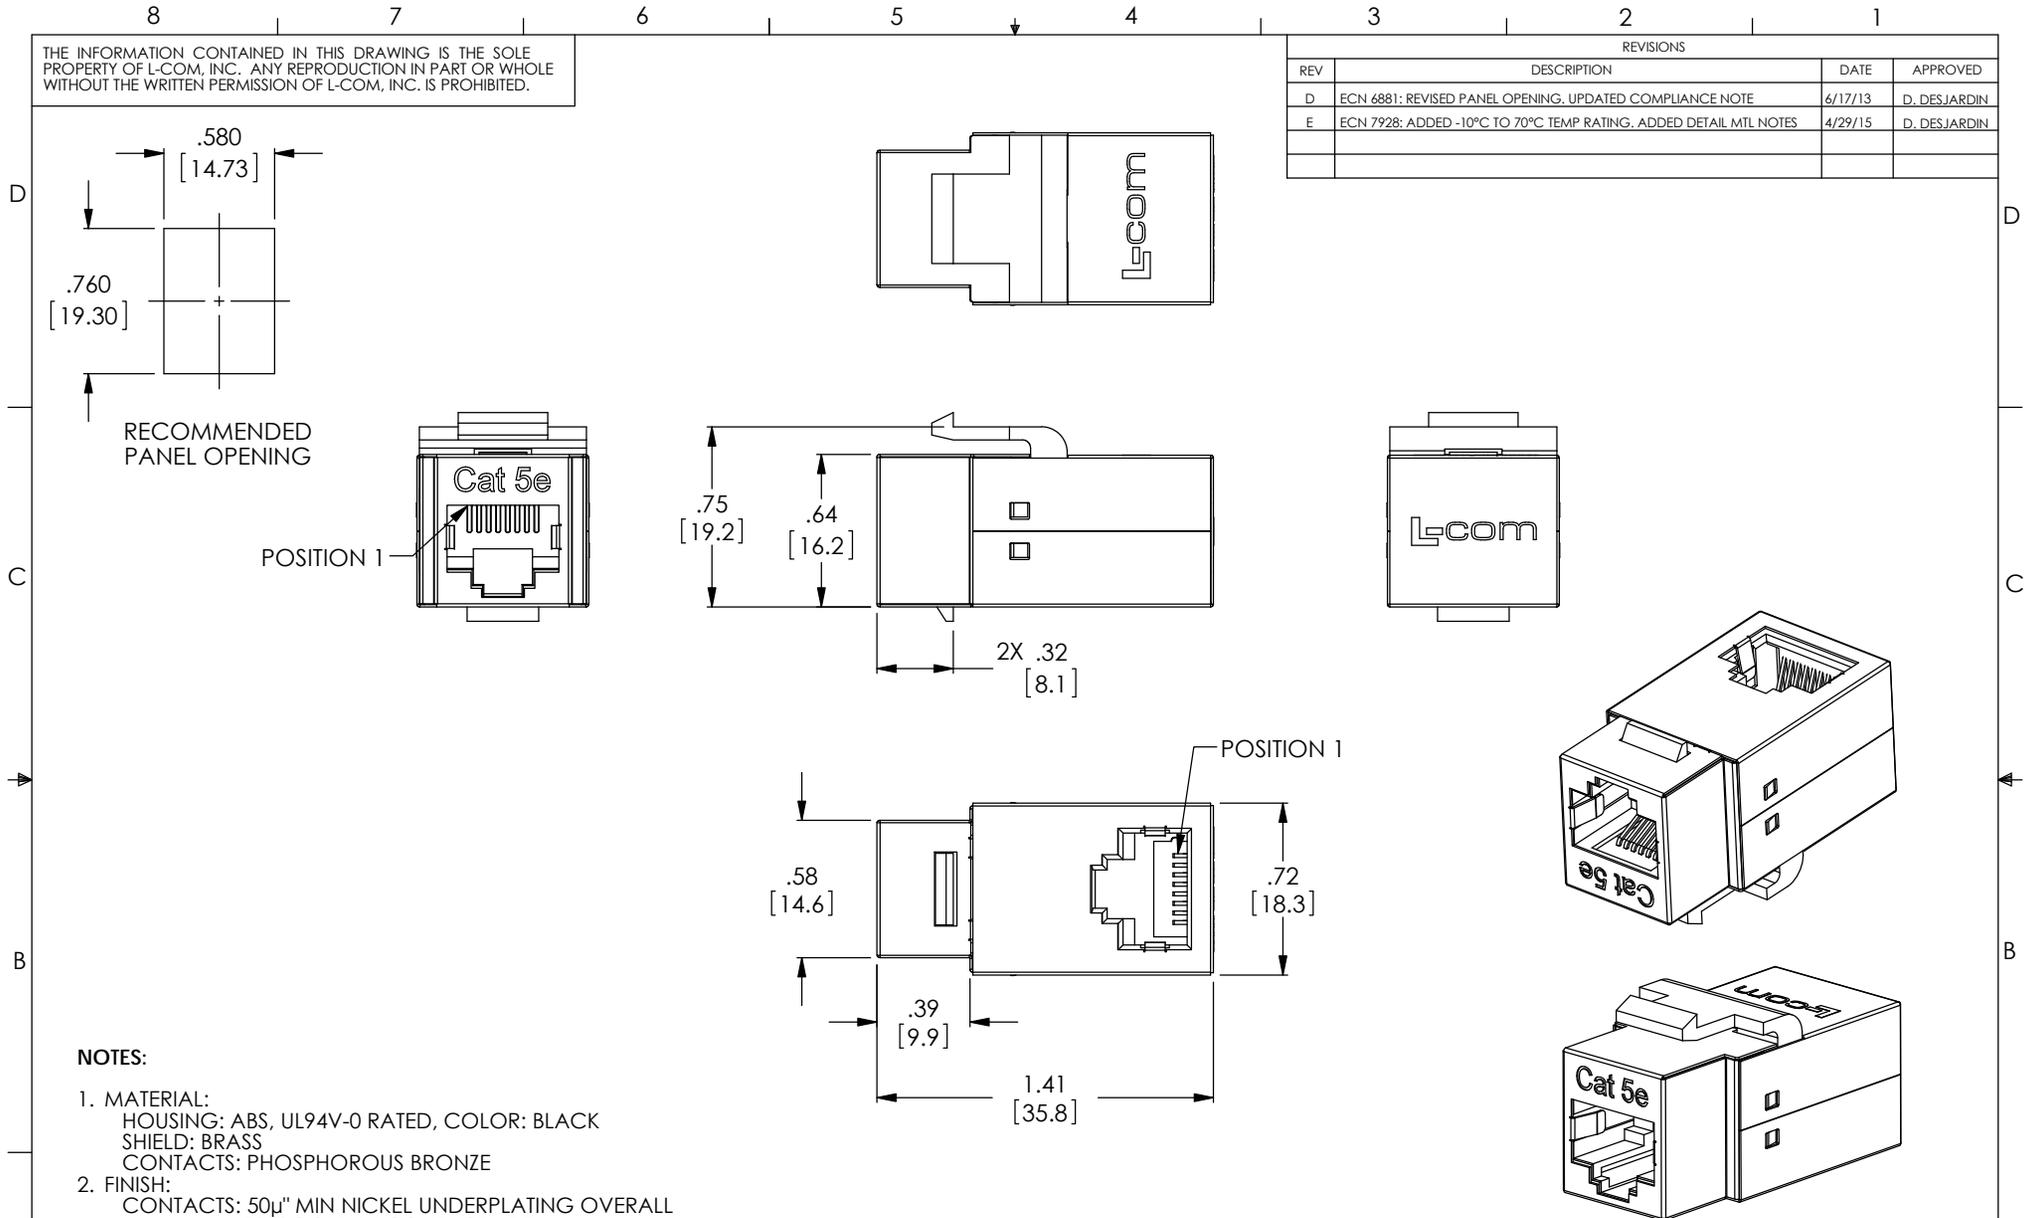

**NOTES:**

- MATERIAL:**  
HOUSING: ABS, UL94V-0 RATED, COLOR: BLACK  
SHIELD: BRASS  
CONTACTS: PHOSPHOROUS BRONZE
- FINISH:**  
CONTACTS: 50µ" MIN NICKEL UNDERPLATING OVERALL  
50µ" GOLD IN CONTACT AREA  
SHIELD: NICKEL PLATE
- ELECTRICAL:**  
RATING: CATEGORY 5E  
WIRING: STRAIGHT THROUGH
- MISCELLANEOUS:**  
OPERATING TEMPERATURE: -10°C TO +70°C  
JACK CONFORMS TO TIA-1096  
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY D. PARHAM CHECKED BY D. CASTRO APPROVED BY P. MCNEIL	DATE 12/14/2009 12/17/2009 12/17/2009	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY TELECOM / MODULAR
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CPLR RJ45 F/F CAT5E SHIELDED RT ANGLE	SCALE: NONE CAD FILE: TDG1026KCS-R5E.SLDDRW SHEET 1 OF 1
	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>TDG1026KCS-R5E</b>	REV. <b>E</b>