




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/15/03	D.F.P.
B	ECN1535: CHANGED PANEL OPENING. SIZE WAS .580 X .760	10/6/03	D.F.P.
C	ECN1619: ADDED COMPONENT SPECIFICATION TABLE	12/15/03	D.F.P.
D	ECN 6881: UPD DWG FORMAT. CONSOLIDATED ALL COLORS TO ONE DWG.	6/10/13	D. DESJARDIN



RECOMMENDED  
PANEL OPENING

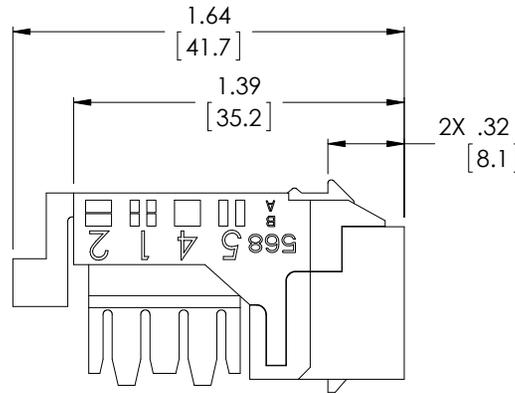

POSITION 1

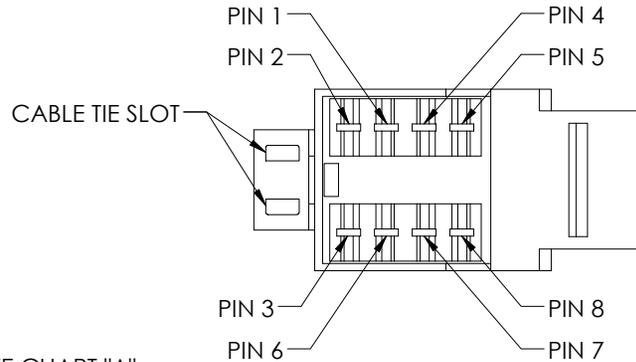


CHART "A"	
MODEL NUMBER	COLOR
UJ110C5E-BLK	BLACK
UJ110C5E-BLU	BLUE
UJ110C5E-BRN	BROWN
UJ110C5E-GRN	GREEN
UJ110C5E-GRY	GRAY
UJ110C5E-I	IVORY
UJ110C5E-ORN	ORANGE
UJ110C5E-RED	RED
UJ110C5E-W	WHITE
UJ110C5E-YEL	YELLOW

**NOTES:**

**MATERIAL:**

HOUSING: ABS, UL94V-0 COLOR: SEE CHART "A"  
CONTACTS: COPPER ALLOY  
CONTACT PLATING: GOLD

**MISCELLANEOUS:**

JACK DURABILITY: MINIMUM OF 500 INSERTION AND WITHDRAWAL CYCLES  
OPERATING TEMPERATURE: 0 °C TO 60 °C  
RATING: CATEGORY 5E  
PANEL THICKNESS .06" MAX

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.  
CABLE TIE SUPPLIED

ALL DIMENSIONS ARE FOR REFERENCE ONLY

**REGULATORY COMPLIANCE:**

ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY D. PARHAM CHECKED BY T. CLARK APPROVED BY C. McCORMICK	DATE 8/3/2003 8/15/2003 8/15/2003	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
	COLOR VARIATIONS MAY OCCUR		
	SCALE: NONE		

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY TELECOM/MODULAR			
PRODUCT DESCRIPTION JACK CAT5E RJ45/110			
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. UJ110C5E	REV. <b>D</b>
SCALE: NONE		CAD FILE: UJ110C5E.SLDDRW	SHEET 1 OF 1